



**Shenzhen Office :**

3-A1, Building A, Qingchuangcheng, Pinkexiao zhen, Zhangkeng community,  
Minzhi Town, Longhua District, Shenzhen, Guangdong Province, China  
Tel: 86.755.8886.8949

**China Factory :**

No.28 Binjiang Blvd., Shishuikou Village, Qiaotou Town, Dongguan, Guang Dong Province  
Tel: 86.769.8929.7777

**Vietnam Factory :**

P-9, Trang Due Industrial Zone Belongs To Dinh Vu - Cat Hai Economic Zone, An Hoa  
Commune, An Duong District, Hai Phong City  
Tel: 84.225.3558.880

Web: [www.power7tech.com](http://www.power7tech.com)



# Docking Stations Hubs and Enclosure/Storage Products





**Dongguan Factory**



**Vietnam Factory**

## – COMPANY PROFILE

Power 7 Technology specializes in the innovative design and manufacturing of complex external storage solutions, mobile power devices, and peripheral solutions that are compatible with variety of computer and mobile iOS platforms. Our dedication to excellence in technology, innovation, design, quality, and customer service has led to our reputation on a global scale. We have over 30 years of OEM/ODM and Electronics Manufacturing Services (EMS) experience. As a trusted supplier and manufacturer, we created long-term partnerships with several world-class and local businesses that rely on our knowledge, expertise, and services.

## – COMPANY VISION

To design, manufacture, and deliver excellent products and solutions to our customers in a timely and superior manner. Accept projects that are within our skills, knowledge, expertise and focus on the ones in which we excel in to become the partner of choice.

## – COMPANY PHILOSOPHY

**Competitive Advantage:** Competitive advantages are established through significant investments in research and development. Three principles guide our engineering and production practices: **QUALITY, QUALITY, and QUALITY.** Quality serves as our strongest competitive advantage.

**Creative Innovation:** Knowledge, experience, and imagination work together to foster creativity in the development of featured products.

**Accountability Commitment:** Providing steadfast support for our products and services is at the core of our meticulous approach.



## TB5-S01 (TBT5 SSD)

- 1x USB-C Port: TBT5 UFP Support data rate up to 80Gbps
- 1x USB-C Port: PD 25W input
- 1x Built-in M.2 Slot: Supports NVME PCIe Gen4\*4 max 64Gbps
- Support M.2 2230, 2242, 2260, and 2280 SSD form factors
- Support NTFS, FAT32, and exFAT file systems
- Compatible with Windows Os, Mac OS and Chrome OS.
- Hardware compatibility: Support TBT5/TBT4/USB4 V2/USB4
- Housing: Aluminum/ Plastic/ Silicone
- Product Dimensions: 135mm\*60mm\*18mm





## V4-S01 (USB4.0 SSD Enclosure)

- 1x USB-C Port: USB4 UFP Support data rate up to 40Gbps
- 1xBuilt-in M.2 Slot; Support NVMe PCIe Gen4\*4 max 64Gbps
- Support M.2 2230, 2242, 2260, and 2280 SSD form factors
- Support NTFS/FAT32/exFAT/HFS+/APFS File Systems
- Compatible with above Windows 11 and MacOS 13.5
- Housing: Aluminum/Plastic/Silicone
- Product Dimensions: 140mm\*60mm\*21mm




## TB5-S02 (TBT5 SSD)

- 1x USB-C Port: TBT5 UFP Support data rate up to 80Gbps
- 1x Built-in M.2 Slot: Support NVME PCIe Gen4\*4 max 64Gbps
- Support M.2 2230, 2242, 2260, and 2280 SSD form factors
- Support NTFS, FAT32, and exFAT file systems
- Compatible with Windows, Mac OS and Chrome OS.
- Hardware compatibility: Support TBT5/TBT4/USB4 V2/USB4
- Housing: Aluminum/Plastic/Silicone
- Product Dimensions: 140mm\*60mm\*21mm



## RD-01 (USB20G RAID SSD)

- 1x USB-C Port: USB3.2 UFP data rate up to 20Gbps
- 2x Built in M.2 Slot. Support NVME PCIe GEN3x2 16Gbps/SATA3 6Gbps
- Housing: Aluminum
- Product Dimensions: 136mm\*66mm\*18mm

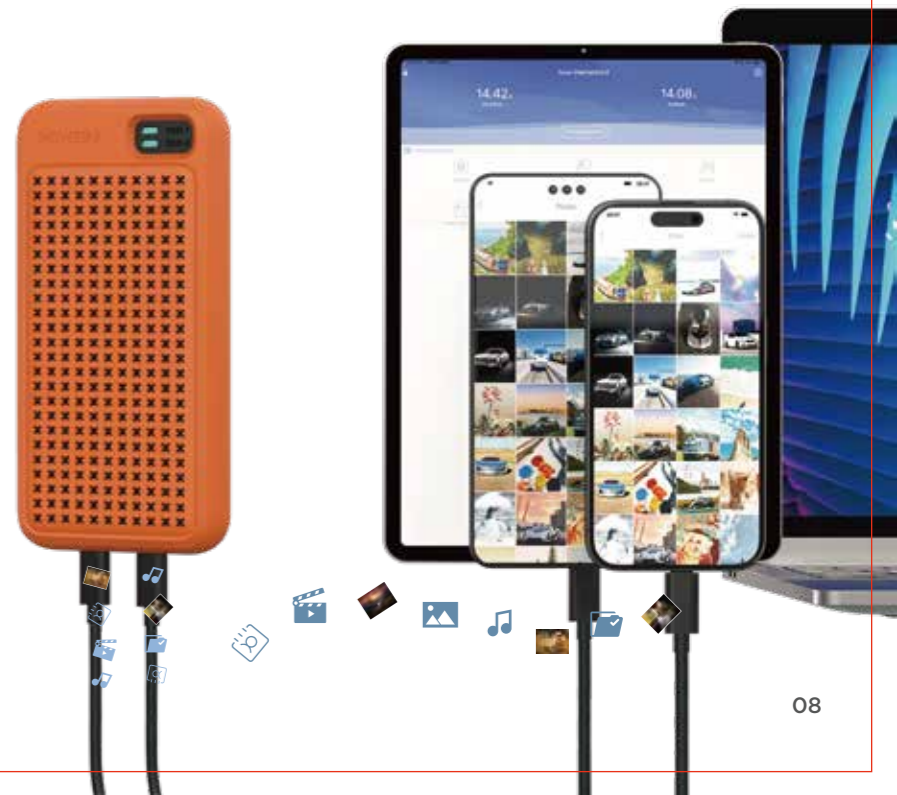

## V4-H01 (6in1 USB4 hub)

- 1x USB-C Port: USB4 UFP Support data rate up to 40Gbps & PD 100W output
- 1x USB-C Port: USB3.2 DFP&PD3.1 Support data up to 20Gbps&PD 140W input
- 2x USB-C Port: USB4 DFP Support data rate up to 40Gbps
- 1x USB-C Port: USB3.2 DFP Support data transfer speeds up to 20Gbps,
- 1x HDMI Port: HDMI2.1 Output Support 8K at 60Hz
- Compatible with above Windows 10 and MacOS 12
- Housing: Aluminum/ Plastic
- Product Dimensions: 110mm\*55mm\*18mm



## TB5-DK-01 (16in1 TBT5 MST Docking Station)

- 1x USBC Port: TBT5 UFP&PD3.1 Support data rate up to 80Gbps &PD3.1 140W output
- 1x USBC Port: TBT5 DFP&PD3.0 Support data rate up to 80Gbps &PD3.0 30W output
- 1x USBC Port: TBT5 DFP&PD3.0 Support data rate up to 80Gbps &PD3.0 15W output
- 1x HDMI Port: HDMI2.1 Support HDMI up to UHD 8K@60Hz/4K@120Hz
- 1x DP Port : DP2.0 Support 8k@60Hz/4K@120Hz
- 1x RJ45 Port: 2.5G Integrated10/100/1000M/2.5G transceiver;
- 2x USBC Port:USB3.2 DFP Support data rate up to 10Gbps
- 2x USBA Port: USB3.2 DFP Support data rate up to 10Gbps
- 2x USBA Port: USB2.0 DFP Support data rate up to 480Mbps
- 1x SD Port: SD4.0 Support SDHC/SDXC/UHS-II 312Mbps
- 1x TF Port:TF4.0 Support UHS-II 312Mbps
- 1x 3.5 Audio Port : 3.5 audio combine Jack Supports 96K stereo audio output and microphone input
- 1x DC Port: Power input 280W (28V@10A)
- 1x Power Button
- 1x Kensington Lock
- Computer compatibility:TBT5/TBT4/USB4/TBT3
- System compatibility: Compatible with Windows and MacOS
- Housing: Aluminum/Plastic
- Product Dimensions: 150mm\*100mm\*50mm





### EAT10G-02 (10G Ethernet Adapter)

- 1xUSB-C Port: USB3.2 UFP Support Data rate up to 20Gbps,
- 1xRJ45 Port: RJ45 Port Support 10Gb/s, 5Gb/s, 2.5Gb/s, 1Gb/s and 100Mb/s Base-T
- System compatibility: Compatible with Windows and MacOS
- Housing: Aluminum
- Product Dimension: 83mm\*40mm\*20mm

### EAT10G-01 (10G Ethernet Adapter)

- 1xUSB-C Port: USB4 UFP Support Data rate up to 40Gbps,
- 1xRJ45 Port: RJ45 Port Support 10Gb/s, 5Gb/s, 2.5Gb/s, 1Gb/s and 100Mb/s Base-T
- Computer compatibility:TBT5/TBT4/USB4/TBT3
- System compatibility: Compatible with Windows10/11 and MacOS Ventura
- Housing: Aluminum
- Product Dimensions: 96mm\*61mm\*26mm



### R10G (10G Ethernet Adapter)

- 1xUSB-C Port: TBT3 UFP Support Data rate up to 40Gbps,
- 1xRJ45 Port: RJ45 Port Support 10Gb/s, 5Gb/s, 2.5Gb/s, 1Gb/s and 100Mb/s Base-T
- Computer compatibility:TBT5/TBT4/USB4/TBT3
- System compatibility: Compatible with Windows10/11 and MacOS Ventura
- Housing: Aluminum
- Product Dimension: 86.4mm\*54mm\*26mm





## DK-01 (16in1 USB-C Docking Station)

- 1x USB-C Male Cable: USB-C UFP Support DP1.4&USB3.2 10G& PD3.0 81W output
- 1x DC Port: Power input 150W(20V@7.5A) Charger
- 2x HDMI Port: HDMI2.0 Support UHD up to 4k@60HZ
- 1x DP Port: DisplayPort™ 1.4 Support UHD Up to 4k@60HZ
- 2x USB-A Port: USB3.2 DFP Support data rate up to 10Gbps
- 2x USB-A Port: USB2.0 DFP Support data rate up to 480Mbps
- 1x USB-C Port: USB3.2 DFP Support data rate up to 10Gbps
- 1x USB-C Port: USB-C DFP Support PD 18W Charging
- 1x USB-A Port: USB-A DFP Support QC 18W Charging
- 1x RJ45 Port: RJ45 Support 1Gb/s and 100Mb/s and 10MB/s Base-T
- 1x SD Port: SD3.0 Card Reader Support SDHC/SDXC/ UHS-I 104Mbps
- 1x TF Port: TF3.0 Card Reader Support SDHC/SDXC/ UHS-I 104Mbps
- 2x 3.5 Audio Port: 3.5" Audio Support for 48k stereo output and mic input (2 option 1)
- System compatibility: Compatible with Windows8 and MacOS 10.12
- Housing: Aluminum and Plastic
- Product Dimensions: 114.7mm\*53.43mm\*139.85 mm



## HB-10 (7in1 Steam Deck hub)

- 1 USB-C Cable: Support charging up to PD 100W
- Support DisplayPort™ (DP) 1.2, 1.4 specifications and USB 3.2 up to 5Gbps data transfer speed
- 1- USB-C Port: Support up to PD 100W input
- 2- USB-C 3.0 Ports: Support data transfer speeds at up to 5Gbps, backward compatible with USB 2.0
- 1- HDMI: Support up to UHD 3840x2160@60Hz
- 1- SD and 1TF Card Reader: Supports SDHC/SDXC/UHS-1
- 1 RJ45 Port: Support 10/100/1000MB Network speeds
- Compatible with Windows 8 and latest versions; Apple MacOS 12 and latest versions
- Housing: Plastic
- Product Dimensions: 167mm\*75.13mm\*32.55mm



## HB-09 (5in1 Steam Deck hub)

- 1x USB-C Male Cable: USB-C UFP Support DP1.4&USB3.2 5G& PD3.0 100W output
- 1x USB-C Port: USBC DFP Support up to PD 100W input
- 2x USB-C Port: USBC DFP Support data rate up to 5Gbps
- 1x HDMI Port: HDMI2.0 Support up to UHD 4k@60Hz
- 1x RJ45 Port: RJ45 Support 1Gb/s and 100Mb/s and 10MB/s Base-T
- 1x TF Port:TF3.0 Card Reader Support SDHC/SDXC/UHS-I 104Mbps
- System compatibility: Compatible with Windows8 and MacOS 10.12
- Housing: Plastic
- Product Dimensions: 81.37mm\*122mm\*33.70mm

## HS-010 (6in1 USB4 hub)

- 1x USB-C Male Cable: USB4.0 UFP Support data rate up to 40Gbps & PD3.0 85W output
- 1x USB-C Port: USBC DFP Support up to PD 100W input
- 1x RJ45 Port: RJ45 Support 1Gb/s and 100Mb/s and 10MB/s Base-T
- 1x HDMI Port: HDMI2.1 Support up to UHD 8k@60Hz
- 2x USB-A Port: USB3.2 DFP Support data rate up to 10Gbps
- 1x USB-C Port: USB3.2 DFP Support data rate up to 10Gbps
- System compatibility: Compatible with Windows8 and MacOS 10.12
- Housing: Aluminum/Plastic
- Product Dimensions: 116mm\*46mm\*14mm





## H2 (File hub with Apps)

- 1x Micro USB3.0 Port: USB3.2 UFP Support data rate 5Gbps & 10W (5V@2A) input
- 1x USB-A 2.0 Port: USB2.0 DFP Support data rate 480Mbps & 2.5W(5V@500mA) output
- 1x SD Slot: SD3.0 card reader Support SD/SDHC/SDX C/USH-I 104Mbps Capacity up to 2TB
- 1x Built-in 5000mAh Li-Polymer Battery Cell
- Built-in SATA Slot: SATAIII Support data rate up to 6 Gbps
- 4x LEDs for Power Status and Data
- 1x Power Button
- Support NTFS / FAT32 / exFAT / HFS+ / APFS File Systems
- System compatibility: Compatible with Windows ,MacOS ,IOS and Andriod OS
- Housing: Plastic
- Product Dimension: 129mm\*83.50mm\*25mm





### H3 (File hub with Apps)

- 1x Micro USB3.0 Port: USB3.2 UFP Support data rate 5Gbps & 10W (5V@2A) input
- 1x USB-A 2.0 Port: USB2.0 DFP Support data rate 480Mbps & 2.5W(5V@500mA) output (2opition 1)
- 1x USB-C 2.0 Port: USB2.0 DFP Support data rate 480Mbps & 2.5W(5V@500mA) output (2opition 1)
- Built-in SATA Slot: SATAIII Support data rate up to 6 Gbps
- 1x SD Slot: SD3.0 card reader Support SD/SDHC/SDXC/USH-I 104Mbps Capacity up to 2TB
- 1x Built-in 5000mAh Li-Polymer Battery Cell
- 4x LEDs for Power Status and Data
- 1x Power Button
- Support NTFS/FAT32/exFAT/HFS+/APFS File Systems
- System compatibility: Compatible with Windows, MacOS ,IOS and Andriod OS
- Housing: Plastic and Micro Fiber
- Product Dimension: 117mm\*80mm\*22mm





#### H4 (File hub with Apps)

- 1x USB-C Port: USB3.2 UFP Support data rate up to 10Gbps
- 1x USB-C Port: USB2.0 DFP Support 10W (5V@2A) charging input
- 1x Built-in 3000mAh Li-Polymer Battery Cell
- Built-in SATA Slot: SATAIII Support data rate up to 6 Gbps
- 4x LEDs for Power Status and Data
- Support NTFS/FAT32/exFAT/HFS+/APFS File Systems
- System compatibility: Compatible with Windows, MacOS, IOS and Android OS
- Housing: Plastic
- Product Dimension: 116.5mm\*80.2mm\*18.5mm



## DK-02 (12in1 USB-C Docking Station)

- 1x USB-C Male Cable: USB-C UFP Support DP1.2 & USB3.2 5G& PD3.0 65W output
- 2x HDMI Port: HDMI2.0 Support UHD up to 4k@60HZ (Single display), 4k@30Hz(MST display)
- 2x USB-A Port: USB3.2 DFP Support data rate up to 5Gbps
- 2x USB-A Port: USB2.0 DFP Support data rate up to 480Mbps
- 1x USB-C Port: USBC DFP Support PD 18W Charing
- 1x RJ45 Port: RJ45 Support 1Gb/s and 100Mb/s and 10MB/s Base-T
- 1x SD Port: SD3.0 Card Reader Support SDHC/SDXC/UHS-I 104Mbps
- 1x TF Port:TF3.0 Card Reader Support SDHC/SDXC/UHS-I 104Mbps
- 1x 3.5 Audio Port: 3.5' Audio Support for 48k stereo output and mic input
- 1x DC Port: Power input 96W(20V@4.8A) Charger
- Housing: Aluminum/ Plastic
- Product Dimensions: 230mm\*40.30mm\*18mm



## CH-04 (USB-C Display Dongle)

- 1x USB-C Male Cable: USBC UFP Support DP1.2
- 1x HDMI Port: HDMI2.0 Support UHD up to 4k@60HZ
- Housing: Aluminum/ Plastic
- Product Dimensions: 62mm\*34mm\*14mm

## CH-08 (USB-C Display Dongle)

- 1x USB-C Male Cable: USB-C UFP Support DP1.4
- 1x HDMI Port: HDMI2.1 Support UHD up to 8k@60HZ
- Housing: Aluminum/ Plastic
- Product Dimensions: 62mm\*34mm\*14mm



## HB-14 (4in1 MFDP Hub)

- 1x USB-C Male Cable: USB-C UFP Support DP1.4 & USB3.2 10G& PD3.0 85W output
- 1x USB-C Port: USBC DFP(MFDP) Support DP1.4 4k@60HZ&USB3.2 10G& PD3.0 100W input
- 1x USB-C Port: USB-C DFP(MFDP) Support DP1.4 4k@60HZ&USB3.2 10G
- 2x USB-C Port: USBC DFP(MFDP) Support data rate up to 10Gbps
- Support Windows 10,11 (32/64bit); and Mac OS10.12 or above
- Product Dimension: 117.5mm\*29mm\*11mm



## HB-02 (4in1 Hub)

- 1x USB-C Male Cable: USB3.2 UFP Support data rate up to 5Gbps
- 4x USB-A Port: USB-A DFP Support data rate up to 5Gbps
- Housing: Plastic
- Product Dimensions: 106mm\*30.50mm\*11mm

## HB-12 (4in1 Hub)

- 1x USB-C Male Cable: USB3.2 UFP Support data rate up to 5Gbps
- 2x USB-A Port: USBA3.2 DFP Support data rate up to 5Gbps
- 2x USB-C Port: USBC3.2 DFP Support data rate up to 5Gbps
- Housing: Plastic
- Product Dimensions: 106mm\*30.50mm\*11mm



## UC018 (11in1 USB-C HUB)

- 1x USB-C Male Cable: USB-C UFP Support DP1.4 & USB3.2 5G& PD3.0 85W output
- 1x USB-C Port: USB-C DFP Support up to PD 100W input
- 2x HDMI Port: HDMI2.0 Support UHD up to 4k@60HZ (Single display), 4k@30Hz(MST display)
- 2x USB-A Port: USB-A3.2 DFP Support data rate up to 5Gbp
- 1x USB-A Port: USB2.0 DFP Support data rate up to 480Mbp
- 1x USB-C Port: USB3.2 DFP Support data rate up to 5Gbps
- 1x RJ45 Port: RJ45 Support 1Gb/s and 100Mb/s and 10MB/s Base-T
- 1x SD Port: SD3.0 Card Reader Support SDHC/SDXC/UHS-I 104Mbps
- 1x TF Port:TF3.0 Card Reader Support SDHC/SDXC/UHS-I 104Mbps
- 1x 3.5 Audio Port: 3.5' Audio Support for 48k stereo output and mic input
- Housing: Aluminum / Plastic
- Product Dimensions: 116mm\*46mm\*14mm



## M5 (7in1 USB-C HUB)

- 1x USB-C Male Cable: USB-C UFP Support DP1.4&USB3.2 10G& PD3.1 125W output
- 1x USB-C Port: USB-C DFP Support up to PD 140W input
- 1x USB-C Port: USB3.2 DFP Support data rate up to 10Gbps
- 1x HDMI Port: HDMI2.0 Support UHD up to 4k@60HZ
- 1x USB-A Port: USB3.2 DFP Support data rate up to 10Gbps
- 1x RJ45 Port: RJ45 Support 1Gb/s and 100Mb/s and 10MB/s Base-T
- 1x SD Port: SD3.0 Card Reader Support SDHC/SDXC/UHS-I 104Mbps
- 1x TF Port:TF3.0 Card Reader Support SDHC/SDXC/UHS-I 104Mbps
- Housing: Aluminum / Plastic
- Product Dimension: 116mm\*46mm\*14mm





### UC017 (7in1 USB-C HUB)

- 1x USB-C Male Cable: USB-C UFP Support DP1.2&USB3.2 5G& PD3.0 85W output
- 1x USB-C Port: USB-C DFP Support up to PD 100W input
- 1x HDMI Port: HDMI2.0 Support UHD up to 4k@30HZ
- 3x USB-A Port: USBA3.2 DFP Support data rate up to 5Gbps
- 1x SD Port: SD3.0 Card Reader Support SDHC/SDXC/ UHS-I 104Mbps
- 1x TF Port:TF3.0 Card Reader Support SDHC/SDXC/ UHS-I 104Mbps
- Housing: Aluminum/Plastic
- Product Dimensions: 100mm\*40mm\*12.50mm

### UC020 (8in1 USB-C HUB)

- 1x USB-C Male Cable: USB-C UFP Support DP1.2 & USB3.2 5G & PD3.0 85W output
- 1x USB-C Port: USB-C DFP Support up to PD 100W input
- 1x HDMI Port: HDMI2.0 Support UHD up to 4k@60HZ
- 2x USB-A Port: USBA3.2 DFP Support data rate up to 5Gbps
- 1x USB-C Port: USBA3.2 DFP Support data rate up to 5Gbps
- 1x SD Port: SD3.0 Card Reader Support SDHC/SDXC/ UHS-I 104Mbps
- 1x TF Port:TF3.0 Card Reader Support SDHC/SDXC/UHS-I 104Mbps
- 1x 3.5 Audio Port: 3.5' Audio Support for 48k stereo output and mic input
- Housing: Aluminum/Plastic
- Product Dimension: 105mm\*40mm\*10mm



### GS01 (Fingerprint SSD)

- 1x USB-C Port: USBA3.2 UFP Support data rate up to 10Gbps
- Built-in SATA Slot: SATAIII Support data rate up to 6 Gbps
- 1x LED: Power/Data LED
- 1x Built-in fingerprint module features ATA encryption lock.
- Support NTFS / FAT32 / exFAT / HFS+ / APFS File Systems
- Compatible with Windows 10/11 and latest versions  
MacOS 10.12 and latest versions
- Housing: Aluminum and Zinc Alloy
- Product Dimensions: 102.40mm\*30.40mm\*9.40mm



## FS01 (Fingerprint SSD)

- 1x USB-C Port: USB3.2 UFP Support data rate up to 10Gbps
- Built-in SATA Slot: SATAIII Support data rate up to 6 Gbps
- Support M.2 2230, 2242, 2260, and 2280 SSD form factors
- 1x LED: Power/Data LED
- 1x Built-in fingerprint module features ATA encryption lock.
- Support NTFS/FAT32/exFAT/HFS+/APFS File Systems
- Compatible with Windows 10/11 and latest versions MacOS 10.12 and latest versions
- Housing: Aluminum and Zinc Alloy
- Product Dimensions: 102mm\* 30mm\*9mm



## UM003 (PSSD)

- 1x USB-C Port: USB3.2 UFP Support data rate up to 10Gbps
- Built-in SATA Slot: SATAIII Support data rate up to 6 Gbps
- 1x LED: Power/Data LED
- Support M.2 2230, 2242, 2260, and 2280 SSD form factors
- Support NTFS/FAT32/exFAT/HFS+/APFS File Systems
- Compatible with Windows 10/11 and latest versions MacOS 10.12 and latest versions
- Housing: Aluminum and Zinc Alloy
- Product Dimensions: 102mm\* 30mm\*9mm



## Angel2.5 (HDD/SSD Enclosure)

- 1x Micro USB3.0 Port: USB3.2 UFP Support data rate 5Gbps
- Built-in SATA Slot: SATAIII Supports data rate up to 6 Gbps
- 1x LED: Power/Data LED
- Support NTFS, FAT32, exFAT, HFS+ and APFS
- Compatible with Windows 7 and latest versions; MacOS 10.12 and latest versions
- Housing: Plastic
- Product Dimensions: 127mm\*78mm\*7.30mm



## Angel3.5 (HDD/SSD Enclosure)

- 1x Micro USB3.0 Port: USB3.2 UFP Support data rate 5Gbps
- 1x DC Port: 24W(12V@2A) input
- 1x LED: Power/Data LED
- 1x Power On/Off Switch
- Built-in SATA Slot: SATAIII Support data rate up to 6 Gbps
- 1x Power adapter 12V@2A
- Support NTFS, FAT32, exFAT, HFS+ and APFS
- Compatible with Windows 7 and latest versions; MacOS 10.11 and latest versions
- Housing: Plastic
- Product Dimensions: 186mm\*117mm\*34.50m



## MSSD-01 (Magsafe SSD)

- 1x USB-C Port: USB-A3.2 UFP Support data rate up to 10Gbps&PD3.0 85W output
- 1x USB-C Port: USB-C DFP Supports up to PD 100W input
- 1x Built-in M.2 Slot: NVME PCIeGen3\*2 Support data up to 16Gbps
- Support M.2 2230 SSD form factors
- 1x LED: Power/Data LED
- Housing: Aluminum/Plastic
- Product Dimension:  $\Phi 59\text{mm} \times 13\text{mm}$



## MSSD-02 (Magsafe SSD)

- 1x USB-C Port: USB-A3.2 UFP Support data rate up to 20Gbps
- 1x LED: Power/Data LED
- Housing: Aluminum/Plastic
- Dimension:  $\Phi 59 \times 11.5\text{mm}$



## TX100 (PSSD)

- 1x USB-C Port: USB3.2 UFP Support data rate up to 10Gbps
- 1x Built-in M.2 Slot for SATA III Support data rate up to 6Gbps
- Support M.2 2230, 2242, 2260, and 2280 SSD form factors
- 1x LED: Power/Data LED
- Support NTFS/FAT32/exFAT.
- Support Windows OS:7/8/8.1/10; MacOS:10.6/10.7-10.11;
- Housing: Plastic/Silicone
- Dimensions: 54mm \*91mm \*11mm



## TX500 (PSSD)

- 1x USB-C Port: USB3.2 UFP Support data rate up to 10Gbps
- 1x Built-in M.2 Slot: NVME PCIeGen3\*2 Support data up to 16Gbps
- Support M.2 2230, 2242, 2260, and 2280 SSD form factors
- 1x LED: Power/Data LED
- Support NTFS/FAT32/exFAT.
- Support Windows OS:7/8/8.1/10; MacOS:10.6/10.7-10.11;
- Housing: Plastic/Silicone
- Dimensions: 54mm \*94mm \*10.5mm



## Camera Backup (HDD)

- 1x USB-C Port: USB3.2 UFP Support data rate up to 10Gbps
- 1xCFB PCIe Gen3\*2 Support data up to 16Gbps
- 1xCFA PCIe Gen3\*1 Support data up to 8Gbps,
- 1x SD Slot: SD3.0 Support SDHC/SDXC/UHS-I 104Mbps
- 1x Built-in SATA HDD/SSD: SATA3 Support data rate up to 6Gbps; Support HDD Height both 7mm and 9.5mm.
- 1xButton: Power On/Off
- 1x USB-C Port: Charging and discharging port;Discharging output 9V@2A, Charging input 5V@3A
- 1x TFT(with touch function): 1.75 inch Resolution 356\*400
- 1x Battery 10000mAh: Idle time up to 16hours, working time up to 3.6hours
- Housing: Plastic
- Product Dimensions: 155.9\*87.2\*27.1 mm



## Camera Backup (SSD)

- 1x USB-C Port: USB3.2 UFP Support data rate up to 10Gbps
- 1xCFB PCIe Gen3\*1 Support data up to 8Gbps
- 1xCFA PCIe Gen3\*1 Support data up to 8Gbps,
- 1x SD Slot: SD4.0 Support SDHC/SDXC/UHS-I/UHS-II 302Mbps
- 1x Built-in M.2: PCIeGen3\*2 Support data rate up to 16Gbps; Max size 2280.
- 1xButton: Power On/Off
- 1x USB-C Port: Charging and discharging port; Discharging output 9V@2A, Charging input 5V@3A
- 1x TFT(with touch function): 1.75 inch Resolution 356\*400
- 1x Battery 10000mAh: Idle time up to 16hours, working time up to 3.6hours
- Housing: Plastic
- Product Dimensions: 135\*70.5\*27.1 mm



## NAS-1

- 1x RJ45 Port: RJ45 Support 1Gb/s and 100Mb/s and 10Mb/s Base-T
- 1x WiFi: Support WiFi5/WiFi6 data rate up to 1200Mbps
- 1x SD Slot: SD3.0 Support SDHC/SDXC/UHS-I 104Mbps
- 1x USB-A Port: USB3.2 DFP Support data rate up to 5Gbps
- 1x USB-C Port: USB3.2 DFP Support data rate up to 5Gbps
- 1x USB-C Port(PD/in): Max. 27W, 12V@2A; 9V@3A input.
- 1x LED for Power Status
- 1x Button: SD to USB-C External Storage Backup
- 1x Button: Reset
- Housing: Plastic
- Product Dimensions: 110\*80\*30 mm



## NAS-2 (with Antenna)

- 1x RJ45 Port: RJ45 Support 1Gb/s and 100Mb/s and 10Mb/s Base-T
- 1x WiFi: Support WiFi5/WiFi6 data rate up to 1200Mbps
- 1x SD Slot: SD3.0 Support SDHC/SDXC/UHS-I 104Mbps
- 1x USB-A Port: USB3.2 DFP Support data rate up to 5Gbps
- 1x USB-C Port: USB3.2 DFP Support data rate up to 5Gbps
- 1x USB-C Port(PD/in): Max. 27W, 12V@2A; 9V@3A input.
- 1x LED for Power Status
- 1x Button: SD to USB-C External Storage Backup
- 1x Button: Reset
- Housing: Plastic
- Product Dimensions: 110\*80\*30 mm



## TSSD-01(Touch Screen PSSD)

- Touch Screen: Size 1.5 ", Resolution 360\*360
- Support digital password unlocking, display SSD status
- 1x USB-C Port: Support USB 3.2 GEN2, Data rate up to 10Gbps
- 1x M.2 Connector(KEY-M): Support NVMe protocol 2280 2260 2242 2230 size SSD. KEY-M and KEY-B+M compatibility.
- Compatible system: Support Windows(Win10+), Mac OS(10.9+), Android(8.0+), iPad OS 13.1(IPAD2018 USB-C Interface), IOS 17.0(Iphone15+)
- APP: Support one-click backup and incremental backup.
- File system format: Support NTFS/fit32/exFAT file system
- Housing: Aluminum/Zinc alloy
- Product Dimension: 104\*47\*10.2mm



## NFCSec SSD(PSSD)

- 1x USB-C Port: USB 3.2 Gen 2 Support data rate up to 10Gbps
- 1x Built-in M.2 Slot: NVME PCIe Gen3\*2 Support data up to 16Gbps
- Support M.2 2230 and 2242 SSD form factors
- APP: Support Android OS and IOS
- Housing: Plastic
- Product Dimension: 40mm\*56mm\*9mm

